

SVTS A Series

Capsule Slip Rings

High-current Capsule Slip Rings


Radio Frequency Capsule Slip Rings

Contents

[illegible]

SVTS A Series

Capsule

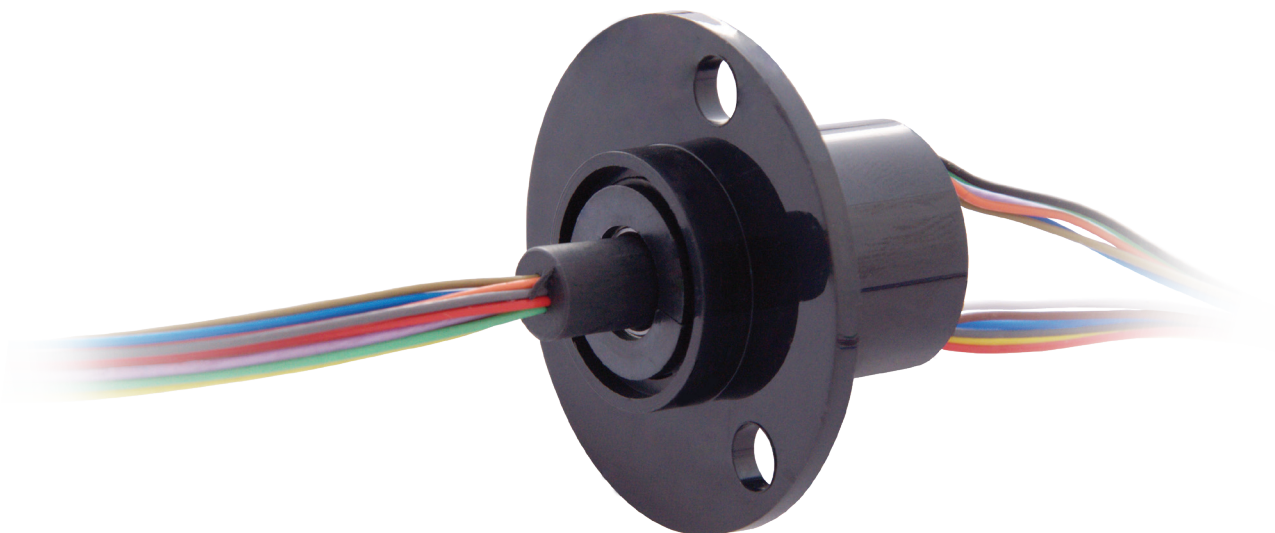

OPTIMAL SIGNAL TRANSMISSION



COMPACT



HIGH CIRCUIT DENSITY

The capsule A Series Slip Rings, thanks to their reduced diameter, guarantees a low peripheral speed between rings and brushes, thus to reduce material consumption so as to enhance its lifetime and minimise electrical noise and interferences between rings.

This Series has been designed keeping signal transmission optimisation, compactness and reliability in mind. Moreover, this Slip Ring family is available in a wide range of configurations, from 3 to 56 circuits.

The gold-gold technology used for both rings and brushes, makes high data rate and high frequency signal transmission possible.

Benefits

Optimal signal transmission (gold-gold technology)

Compact

Light

Many customisations

High circuits density

Combinable with fluidic rotary joints and FORJ

Water resistant (IP65)*

Cost-effective

Main applications

Video systems

Moving head projectors

Packaging

Hose & cable reels

Control systems

Medical / pharmaceutical

Wind turbines

*Optional: SVTS A 03 only

Product code (go to page 9 for the detailed coding system)

SVTS A   -  -  -   /   -     /     -   -  

 Series
  Model
  IP grade ¹
  Flange type
  Power circuits
  Signal circuits
 Cable length (brush side)
 Cable length (ring side)
 Temperature range ²
 Special options ³

¹ IP51 [S]; IP65 [U]

² Standard [ST]; Extended [ET]

³ Ethernet 100BaseT [E1M]; Ethernet 1000BaseT [E1G]

Features

Current	1A: continuous - 2A peak: AWG28 2A: AWG26 4A: AWG22 6A: AWG20 8A: AWG16
Voltage	240 VDC / 240 VAC
Cables	Silver plated / PTFE insulated / colour coded
Cables length	Standard: 250mm; custom cable length increase possible as multiples of 250mm
Dielectric strength	500 VAC @ 60Hz @ 60 sec
Insulation resistance	> 500 MΩ / 500 VDC
Dynamic contact resistance	< 10 mΩ
Nominal speed	250 rpm (higher speed, up to 600 rpm, upon request)
Bearings	Miniature high-precision stainless steel ball bearings
Housing	ABS (hard plastic); Alluminium (SVTS A04)
Contact	Gold-gold (alloy)
Temperature	-20°C to +80°C (-40°C as option)
Protection	IP51; IP65*
Expected lifetime	10 ⁷ revolutions (depending on speed, environmental conditions and size)

*Optional: SVTS A 03 only




Combinations

Electric	Fieldbus	Fluidic (combined solutions)
Signals	EtherCAT	Air
	Profinet	Oil
	Sercos	Water
	Powerlink	
	Ethernet	

Customizations

Cables	Mechanical design	Flange
Materials		




SVTS A 01

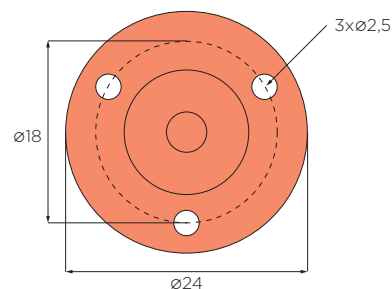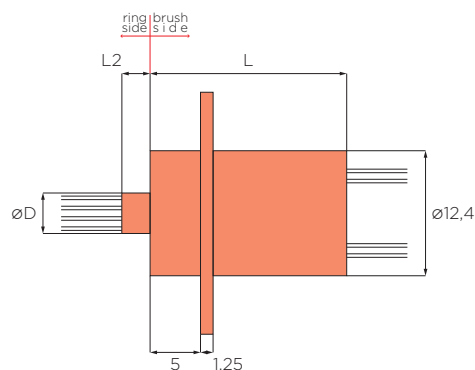

See page 26 for different flange options
Custom cable length increase possible as multiples of 250mm

Model	Number of circuits		Dimensions				Housing
	Total	Signals	Outside ø	L	L2	D	
	1-2A						
SVTS A 01-S-A-00/06	6	6	12.4	14	2.8	4	ABS
SVTS A 01-S-A-00/12	12	12	12.4	19.5	2.8	4	ABS
SVTS A 01-S-A-00/18	18	18	12.4	23	2.8	4	ABS
SVTS A 01-U-A-00/06	6	6	12.4	18	9.5	6	AI
SVTS A 01-U-A-00/12	12	12	12.4	23.5	9.5	6	AI
SVTS A 01-U-A-00/18	18	18	12.4	27	9.5	6	AI

SVTS A 02

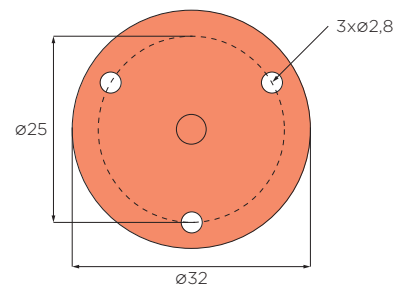
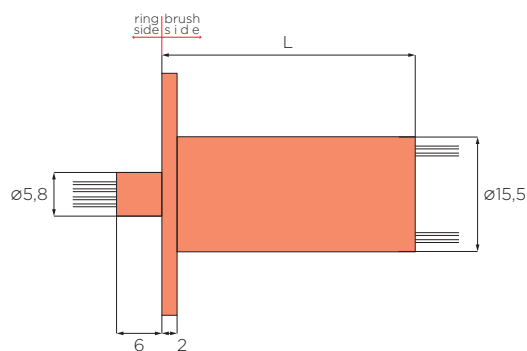


See page 26 for different flange options
Custom cable length increase possible as multiples of 250mm

Model	Number of circuits				Dimensions		Housing
	Total	Signals	Power		Outside ø	L	
		1-2A	6A	8A			
SVTS A 02-S-A-00/24	24	24	-	-	15.5	34	ABS

All dimensions in millimeters, unless otherwise specified

SVTS A 03

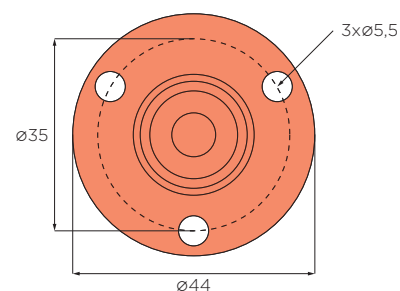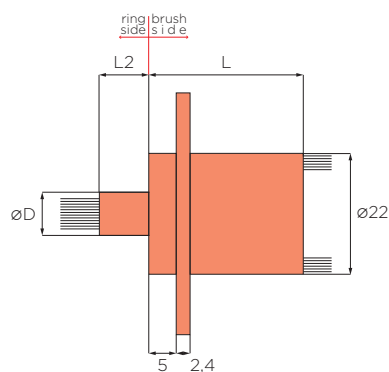

See page 26 for different flange options
Custom cable length increase possible as multiples of 250mm

Model	Number of circuits				Dimensions				Housing
	Total	Signals 1-2A	Power 6A	8A	Outside ø	L	L2	D	
SVTS A 03-S-A-00/06	6	6	-	-	22	19	9	7,8	ABS
SVTS A 03-S-A-00/12	12	12	-	-	22	28	9	7,8	ABS
SVTS A 03-S-A-02/02	4	2	2	-	22	28	9	7,8	ABS
SVTS A 03-S-A-00/15	15	15	-	-	22	29,5	9	7,8	ABS
SVTS A 03-S-A-00/18	18	18	-	-	22	33,4	9	7,8	ABS
SVTS A 03-S-A-03/00	3	-	-	3	22	33,4	9	7,8	ABS
SVTS A 03-S-A-00/24	24	24	-	-	22	41,2	9	7,8	ABS
SVTS A 03-S-A-04/06	10	6	4	-	22	41,2	9	7,8	ABS
SVTS A 03-S-A-00/30	30	30	-	-	22	49,2	6	7,8	ABS
SVTS A 03-S-A-00/36	36	36	-	-	22	57	9	7,8	ABS
IP65 SVTS A 03-U-A-00/06	6	6	-	-	22	23	12,5	13	Al
SVTS A 03-U-A-00/12	12	12	-	-	22	32	12,5	13	Al
SVTS A 03-S-A-02/02	4	2	2	-	22	33,5	12,5	13	Al
SVTS A 03-S-A-00/15	15	15	-	-	22	38	12,5	13	Al
SVTS A 03-S-A-00/18	18	18	-	-	22	38	12,5	13	Al
SVTS A 03-U-A-00/24	24	24	-	-	22	45,2	12,5	13	Al
SVTS A 03-S-A-04/06	10	6	4	-	22	45,2	12,5	13	Al
SVTS A 03-S-A-00/30	30	30	-	-	22	53,2	12,5	13	Al
SVTS A 03-S-A-00/36	36	36	-	-	22	61	12,5	13	Al



Ethernet option*

Model	Number of circuits		Ethernet	L	Weight (kg)
	Total	Signals 2A			
SVTS A 03-S-A-00/00-...-E1M	-	-	100BaseT	19	0,03
SVTS A 03-S-A-00/06-...-E1M	6	6	100BaseT	28	0,05
SVTS A 03-S-A-00/09-...-E1M	9	9	100BaseT	29,5	0,05
SVTS A 03-S-A-00/12-...-E1M	12	12	100BaseT	33,4	0,05
SVTS A 03-S-A-00/18-...-E1M	18	18	100BaseT	41,2	0,07
SVTS A 03-S-A-00/30-...-E1M	30	30	100BaseT	57	0,08
SVTS A 03-S-A-00/00-...-E1G	-	-	1000BaseT	28	0,05
SVTS A 03-S-A-00/03-...-E1G	3	3	1000BaseT	29,5	0,05
SVTS A 03-S-A-00/06-...-E1G	6	6	1000BaseT	33,4	0,05
SVTS A 03-S-A-00/12-...-E1G	12	12	1000BaseT	41,2	0,07
SVTS A 03-S-A-00/24-...-E1G	24	24	1000BaseT	57	0,08

*RJ 45 connectors included

All dimensions in millimeters, unless otherwise specified

SVTS A 04

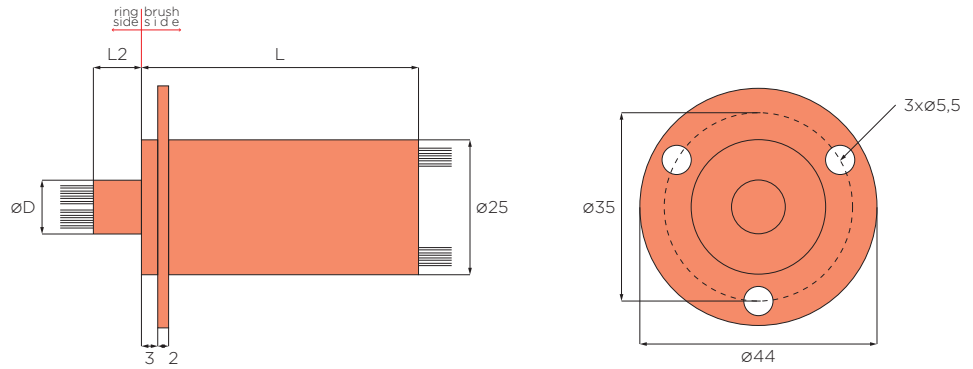

See page 26 for different flange options
Custom cable length increase possible as multiples of 250mm

Model	Number of circuits				Dimensions				Housing
	Total	Signals	Power		Outside ø	L	L2	D	
		1-2A	6A	8A					
SVTS A 04-S-A-00/30	30	30	-	-	25	51.5	9	9.8	AI
SVTS A 04-S-A-04/18	22	18	4	-	25	51.5	9	9.8	AI
SVTS A 04-S-A-03/15	18	15	-	3	25	51.5	9	9.8	AI
SVTS A 04-S-A-00/36	36	36	-	-	25	59.5	9	9.8	AI
SVTS A 04-S-A-04/24	28	24	4	-	25	59.5	9	9.8	AI
SVTS A 04-S-A-04/16	20	16	-	4	25	59.5	9	9.8	AI
SVTS A 04-S-A-00/46	46	46	-	-	25	72.5	9	9.8	AI
SVTS A 04-S-A-00/56	56	56	-	-	25	85.5	9	9.8	AI
SVTS A 04-S-A-04/44	48	44	4	-	25	85.5	9	9.8	AI
SVTS A 04-S-A-04/36	40	36	-	4	25	85.5	9	9.8	AI
IP65 SVTS A 04-U-A-00/30	30	30	-	-	25	55.7	12.5	11.5	AI
SVTS A 04-U-A-04/18	22	18	4	-	25	55.7	12.5	11.5	AI
SVTS A 04-U-A-03/15	18	15	-	3	25	55.7	12.5	11.5	AI
SVTS A 04-U-A-00/36	36	36	-	-	25	63.5	12.5	11.5	AI
SVTS A 04-U-A-04/24	28	24	4	-	25	63.5	12.5	11.5	AI
SVTS A 04-U-A-04/16	20	16	-	4	25	63.5	12.5	11.5	AI
SVTS A 04-U-A-00/46	46	46	-	-	25	76.5	12.5	11.5	AI
SVTS A 04-U-A-00/56	56	56	-	-	25	89.5	12.5	11.5	AI
SVTS A 04-U-A-04/44	48	44	4	-	25	89.5	12.5	11.5	AI
SVTS A 04-U-A-04/36	40	36	-	4	25	89.5	12.5	11.5	AI

Ethernet option*

Model	Number of circuits			L	Weight (kg)
	Total	Signals	Ethernet		
		2A			
SVTS A 04-S-A-00/24-...-E1M	24	24	100BaseT	51,5	0,10
SVTS A 04-S-A-00/30-...-E1M	30	30	100BaseT	59,5	0,12
SVTS A 04-S-A-00/40-...-E1M	40	40	100BaseT	72,5	0,14
SVTS A 04-S-A-00/50-...-E1M	50	50	100BaseT	85,5	0,16
SVTS A 04-S-A-00/18-...-E1G	18	18	1000BaseT	51,5	0,10
SVTS A 04-S-A-00/24-...-E1G	24	24	1000BaseT	59,5	0,12
SVTS A 04-S-A-00/34-...-E1G	34	34	1000BaseT	72,5	0,14
SVTS A 04-S-A-00/44-...-E1G	44	44	1000BaseT	85,5	0,16

*RJ 45 connectors included

All dimensions in millimeters, unless otherwise specified


servotecnica

[illegible]

FLAT

SVTS A Series

High current capsule Slip Rings

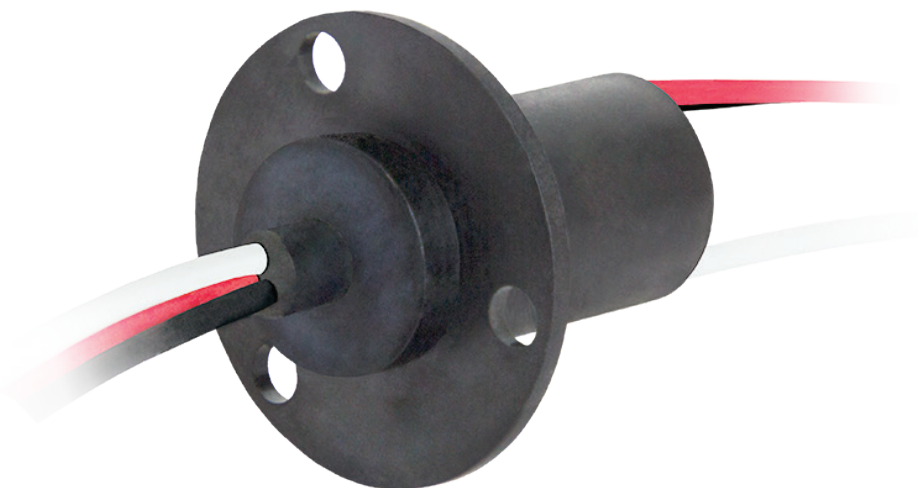

HIGH POWER



COMPACT



COST-EFFECTIVE

The high-current capsule A Series Slip Rings, thanks to their extreme compactness, guarantees a low outer speed between rings and brushes, thus to reduce material consumption so as to enhance its lifetime. This Series has been designed keeping flexibility, cost-effectiveness and reliability in mind. Moreover, this Slip Ring family is available in a wide range of configurations, from 3 to 56 circuits. The gold-gold technology used between rings and brushes, minimise noise and interferences between the rings, allowing high data rate and frequency signal transmission.

In addition, the SVTS A 05 model has been designed to guarantee power circuits in a very small footprint (up to 20 A @ 250 VAC).

Benefits

High power in little space

Compact

Light

Cost-effective

Main applications

Wind turbines

Packaging

Hose & cable reels

Control systems

Packaging

Moving head projectors

Medical / pharmaceutical

Product code (go to page 9 for the detailed coding system)

SVTS A 05 -  -  -   /   -     /     -   -   

A Series 05 Model  IP grade¹  Flange type  Power circuits  Signal circuits

 Cable length (brush side)  Cable length (ring side)  Temperature range²  Special options³

¹ Only IP51 [S]

² Standard [ST]; Extended [ET]

³ 4A circuits [001]; 8A circuits [002]; 10A circuits [003]; 20A circuits [004]

Features

Current	4A: AWG22 6A: AWG20 8A/10A: AWG16 20A: AWG14
Voltage	240 VDC / 240 VAC
Cables	Tin plated / PTFE insulated / colour coded
Cables length	Standard: 250mm; custom cable length increase possible as multiples of 250mm
Dielectric strength	500 VAC @ 60Hz @ 60 sec
Insulation resistance	> 500 MΩ / 500 VDC
Dynamic contact resistance	< 10 mΩ
Nominal speed	250 rpm
Bearings	Miniature high-precision stainless steel ball bearings
Housing	ABS (hard plastic)
Contact	Gold-gold (alloy)
Temperature	-20°C to +80°C (-40°C as option)
Protection	IP51
Expected lifetime	10 ⁷ revolutions (depending on speed, environmental conditions and size)




Combinations

Electric	Fluidic (combined solutions)
Power	Air
	Oil
	Water

Customizations

Cables	Mechanical design	Flange
Materials		

SVTS A 05

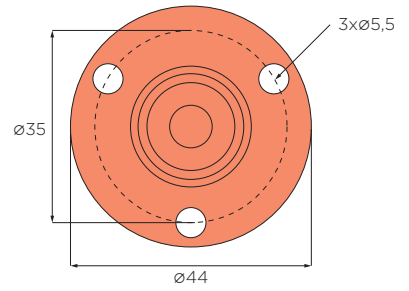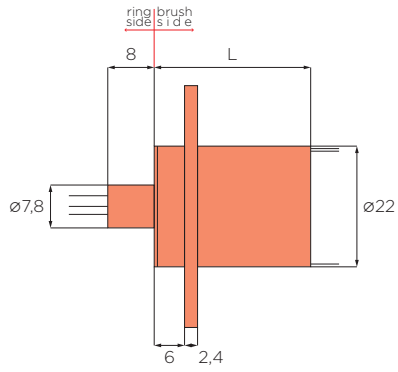

See page 26 for different flange options
Custom cable length increase possible as multiples of 250mm

[illegible]

All dimensions in millimeters, unless otherwise specified


servotecnica

CAPSULE

[illegible]

SVTS A Series

Radio frequency capsule Slip Rings

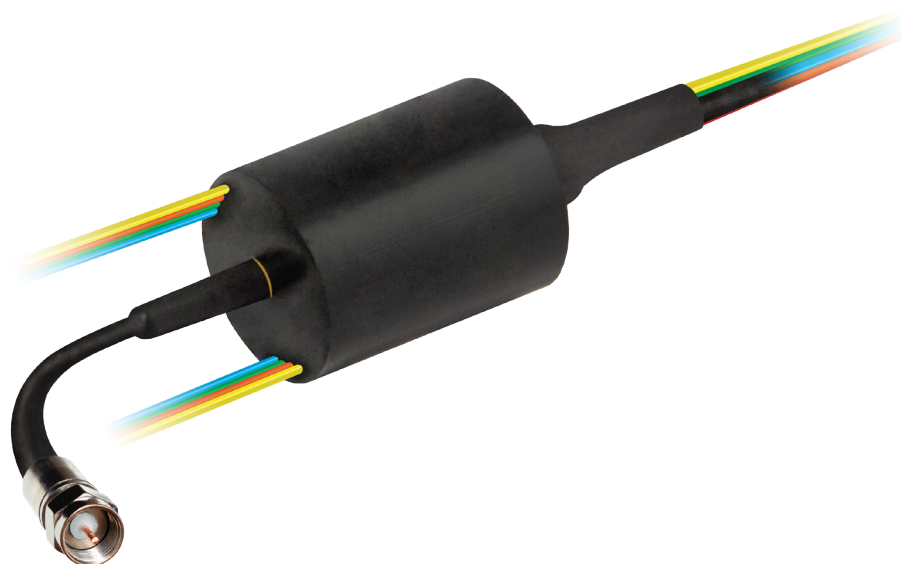

 HI-DEF VIDEO TRANSMISSION

 COMPACT

 HIGH CIRCUITS DENSITY

The radio frequency A Series Slip Rings are used to transfer up to 24 electrical signals from a stationary to a rotating structure, in conjunction with an RF channel.

The RF channel can transfer up to 3 GHz. Designed specifically for transferring high definition video signals (1080p / 3G-SDI o 1080i/HD-SDI), this series can fit RG178, RG316 and RG174 type coaxial cables.

Benefits

RF coaxial connection

High definition video transmission

Optimal signal transmission (gold-gold technology)

Compact

Light

High circuits density

Combinable with fluidic rotary joints and FORJ

Cost-effective

Main applications

RF systems

High definition video systems / CCTV

Optical heads

Product code (go to page 9 for the detailed coding system)

SVTS A 06 -  -  -  /  -  /  -  - 

A Series 06 Model  IP grade¹  Flange type  Power circuits  Signal circuits

 Cable length (brush side)  Cable length (ring side)  Temperature range²  Special options³

¹ Only IP51 [S]

² Standard [ST]; Extended [ET]

³ RG174 [01*]; RG316 [02*]; RG178 [03*]; RG179 [04*]; MMCX [**1]; SMA [**2]; SMB [**3]; MCX [**4]; BNC [**5]

Features

Speed	100 rpm
Temperature	-20°C +80°C (-40°C as option)
Contact	Gold-gold (alloy)
Bearings	Miniature high-precision stainless steel ball bearings
Housing	ABS (hard plastic)
Connector	MMCX, SMA, SMB, MCX, BNC
Cable	RG174, RG136, RG178, RG179



Combinations

Electric
Signals
Video

Customizations

Cables	Mechanical design	Flange
Materials		

SVTS A 06

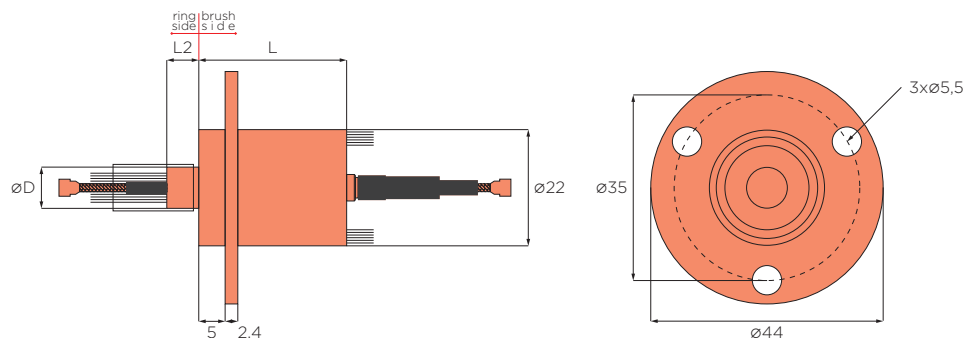

See page 26 for different flange options
Custom cable length increase possible as multiples of 250mm

[illegible]

All dimensions in millimeters, unless otherwise specified


Specifications subject to change.

servotecnica

CAPSULE

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Flange types

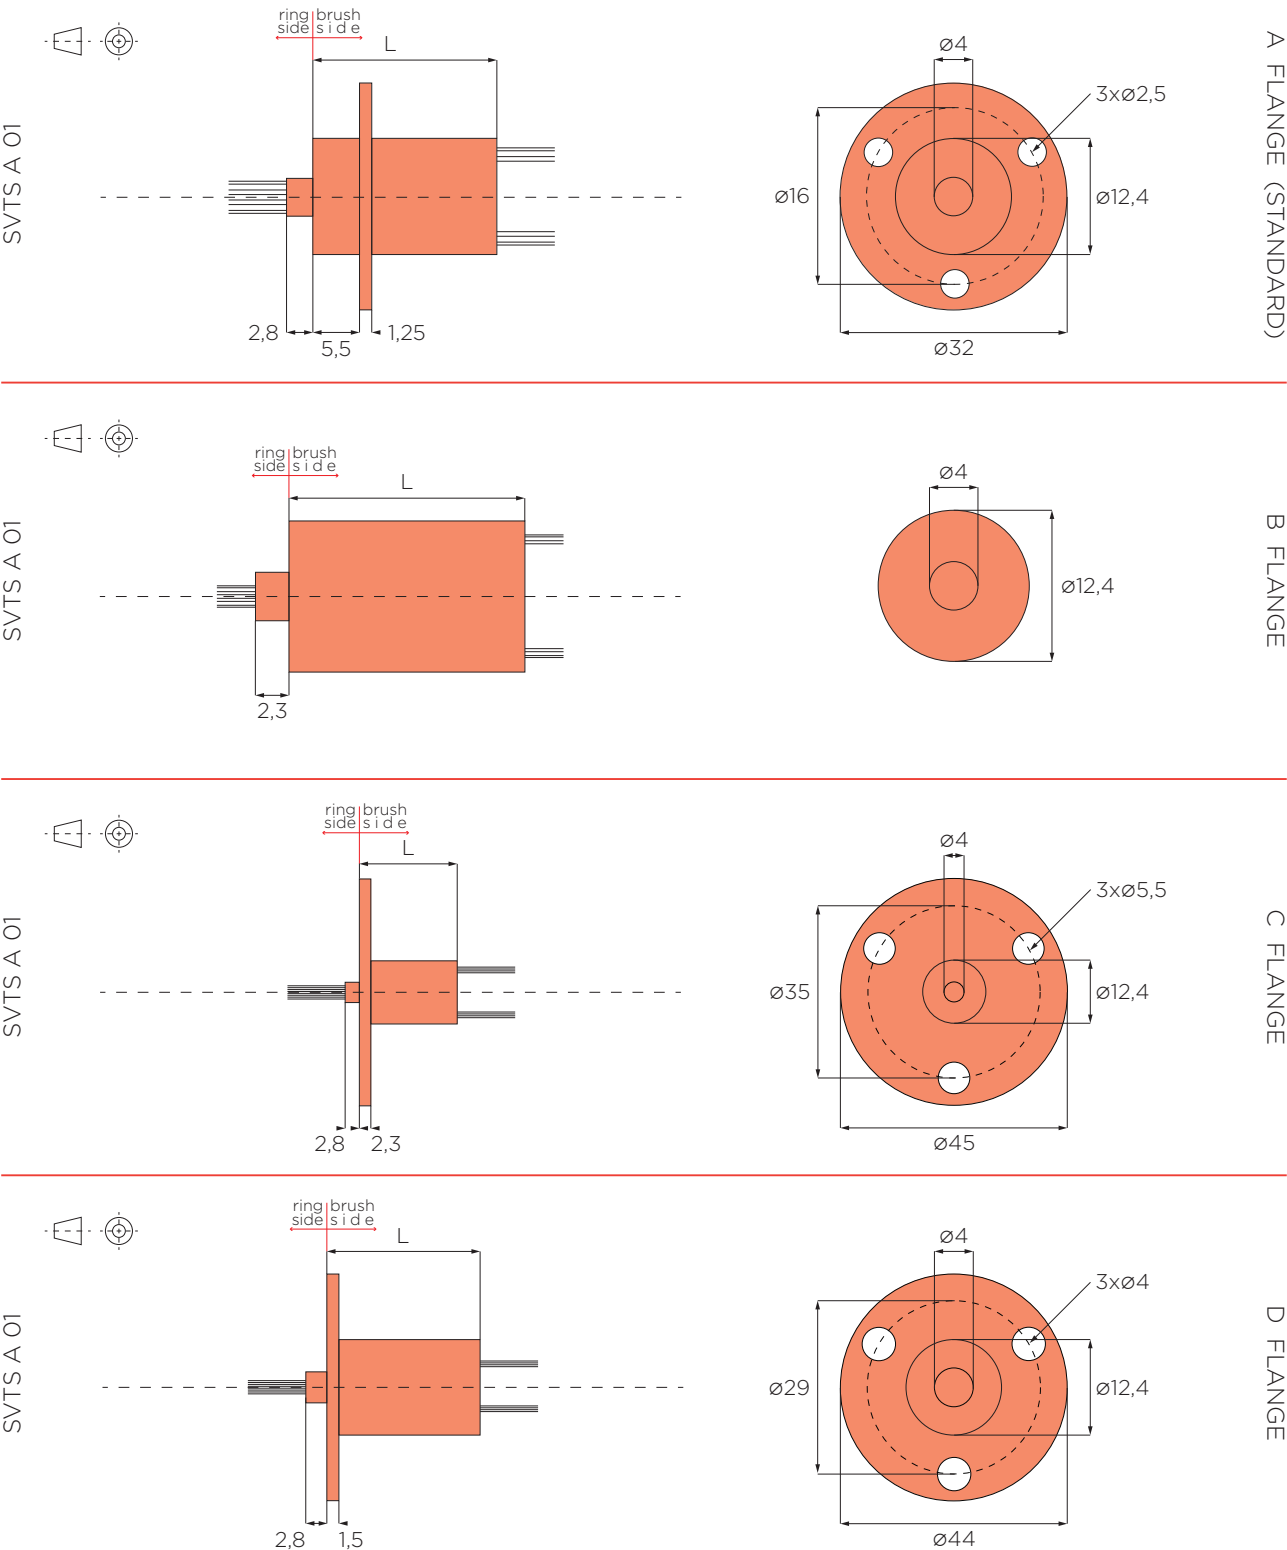

All dimensions in millimeters, unless otherwise specified



Specifications subject to change.

SVTSA 01		E FLANGE
SVTSA 01		F FLANGE
SVTSA 02		A FLANGE (STANDARD)
SVTSA 02		B FLANGE
SVTSA 03		A FLANGE (STANDARD)

All dimensions in millimeters, unless otherwise specified



Specifications subject to change.

SVTS A 03

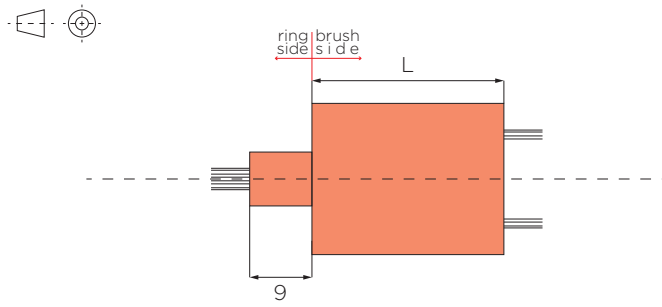



B FLANGE

SVTS A 03

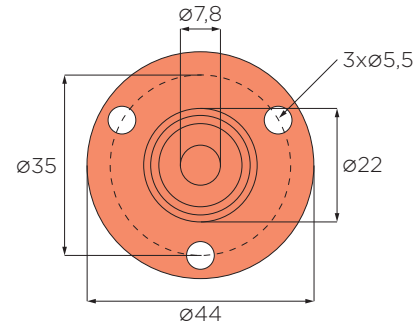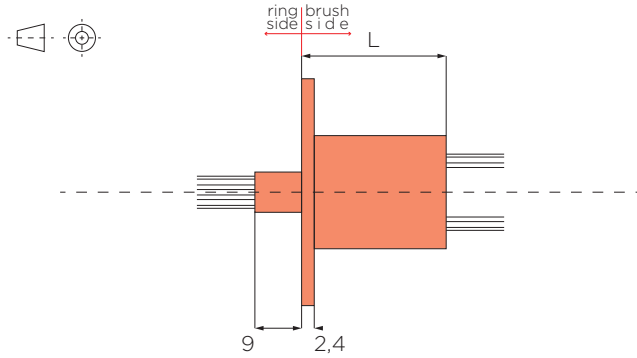



C FLANGE

SVTS A 03

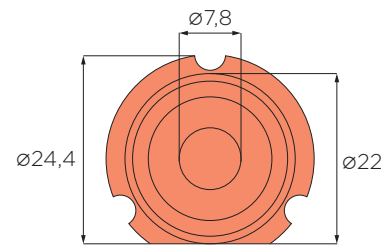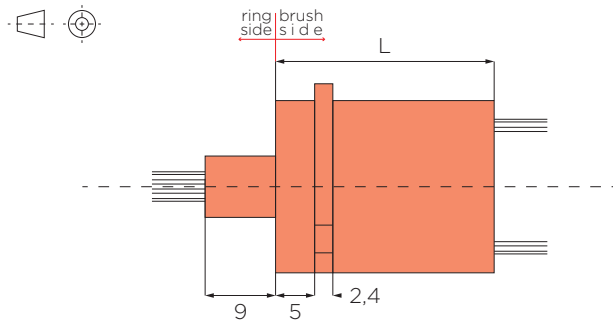



D FLANGE

SVTS A 04

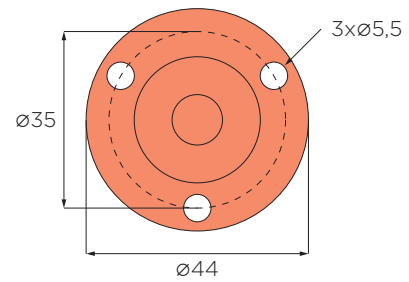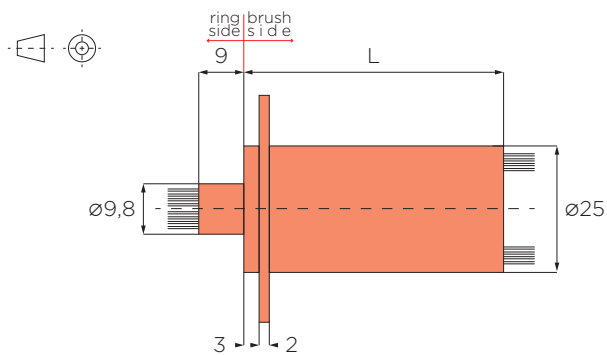

A FLANGE (STANDARD)

SVTS A 04

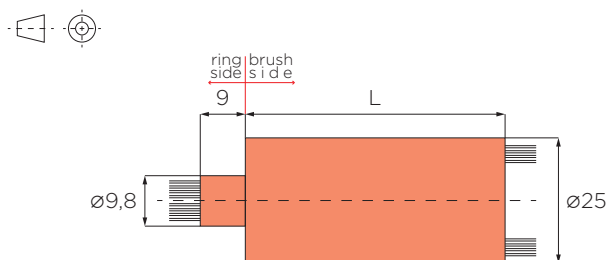


B FLANGE


All dimensions in millimeters, unless otherwise specified

Specifications subject to change.


A FLANGE (STANDARD)

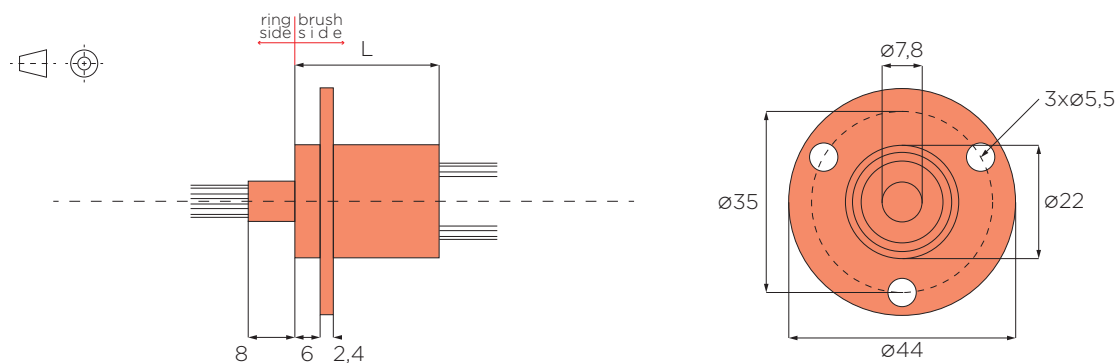


B FLANGE

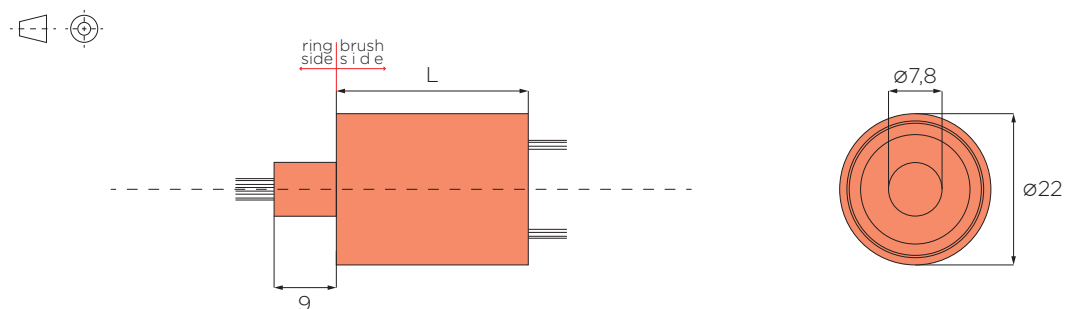


A FLANGE (STANDARD)

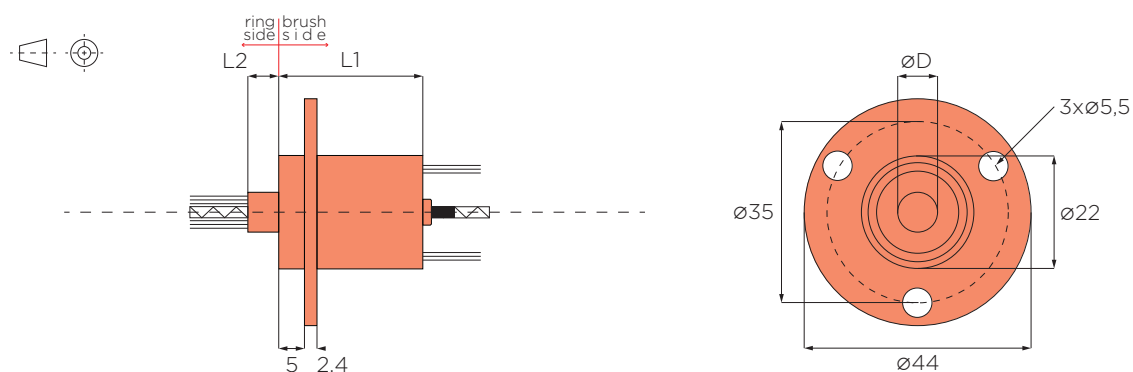

B FLANGE

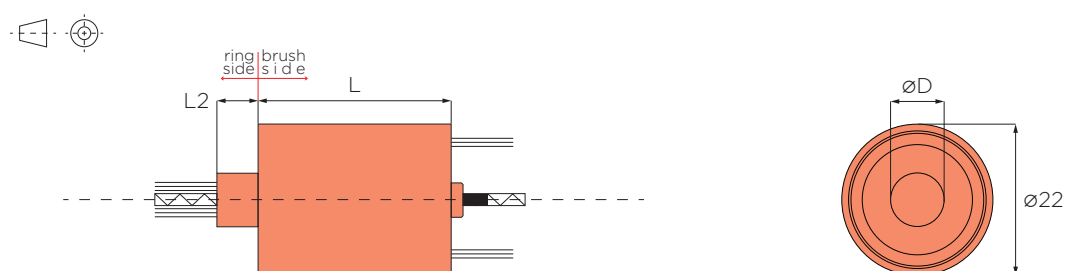

C FLANGE

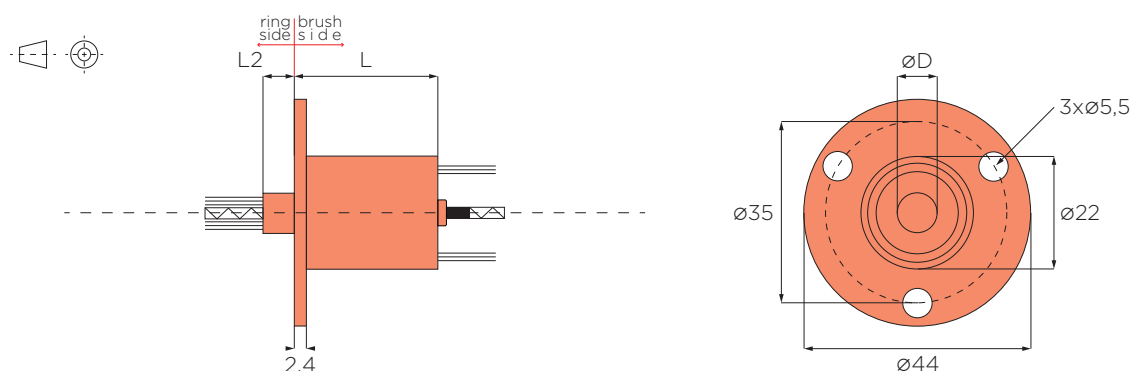

All dimensions in millimeters, unless otherwise specified

Specifications subject to change.