



Technical features

FDM 03





FDM 01



Valves	(For features see catalogue 02.080)	LPB 20
	(For features see catalogue 18.020)	T 20/2
Max. flow	(l/min.)	50
Max. pressure	(bar)	350
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.780
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

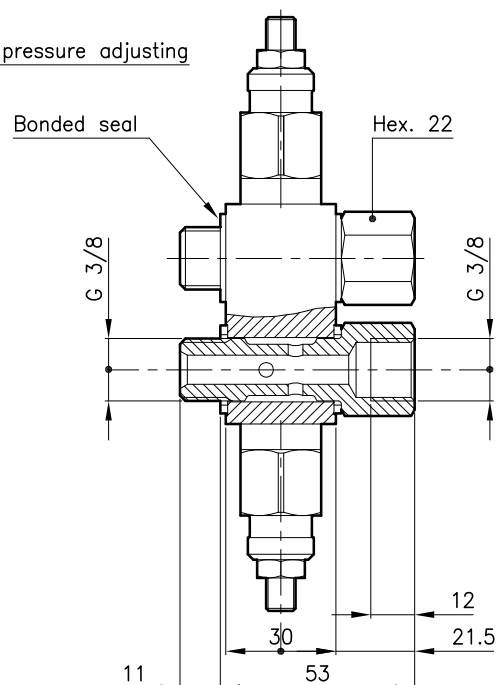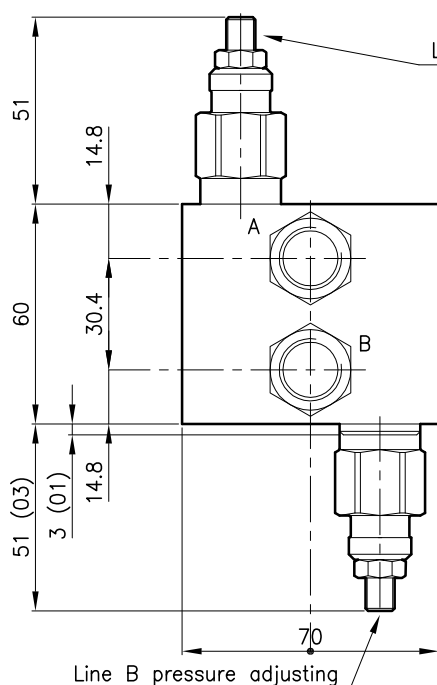

Ordering informations

LPB 20/D-N-FDM 03-B06

Valve type

Standard springs

Type Setting range

U = 10 - 105 bar

D = 70 - 210 bar

T = 140 - 350 bar

Adjustment type

N = Standard adjustment

Version

Standard ports

B06 = G 3/8 ISO 228

Codes:

LPB 20/U-N-FDM 01-B06	21 011 187
LPB 20/D-N-FDM 01-B06	21 011 188
LPB 20/T-N-FDM 01-B06	21 011 189
LPB 20/U-N-FDM 03-B06	21 011 190
LPB 20/D-N-FDM 03-B06	21 011 191
LPB 20/T-N-FDM 03-B06	21 011 192

Only body code:

Body type 20-FDM 03-B06 28 147 100