



Technical features

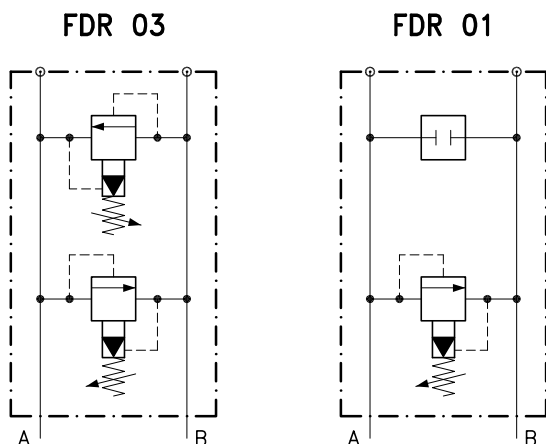

Valves	(For features see catalogue 02.120)	LPI 30
	(For features see catalogue 18.020)	T 30/2
Max. flow	(l/min.)	90
Max. pressure	(bar)	210
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.980
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

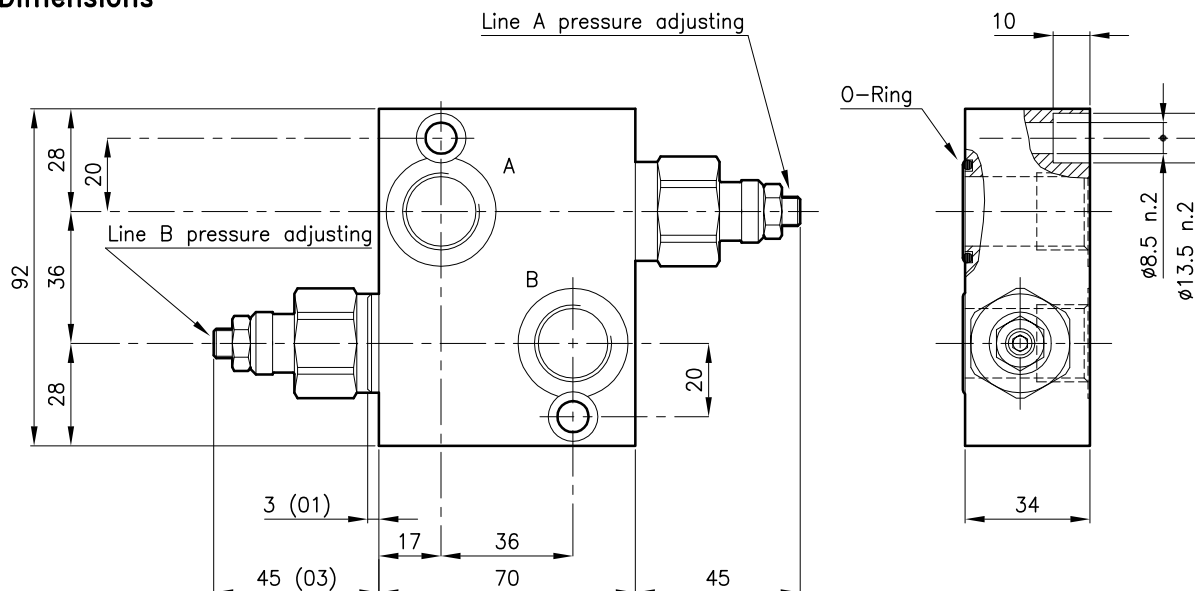

Ordering informations

LPI 30/D-N-FDR 03-B08

Valve type

Standard springs

Type Setting range

D = 14 - 210 bar

Q = 105 - 420 bar

Adjustment type

N = Standard adjustment

Version

Standard ports

B08 = G 1/2 ISO 228

Codes:

LPI 30/D-N-FDR 01-B08 31 011 188

LPI 30/Q-N-FDR 01-B08 31 011 189

LPI 30/D-N-FDR 03-B08 31 011 190

LPI 30/Q-N-FDR 03-B08 31 011 191

Only body code:

Body type 30-FDR 03-B08 38 147 120