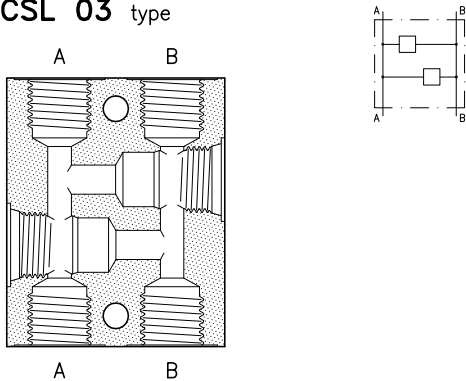
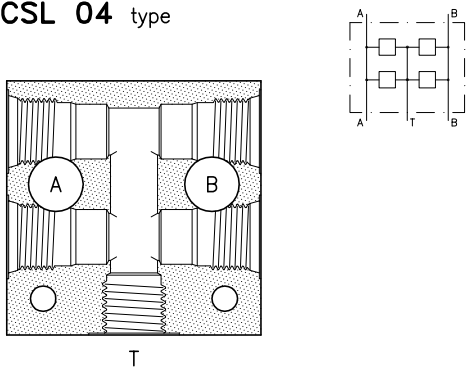
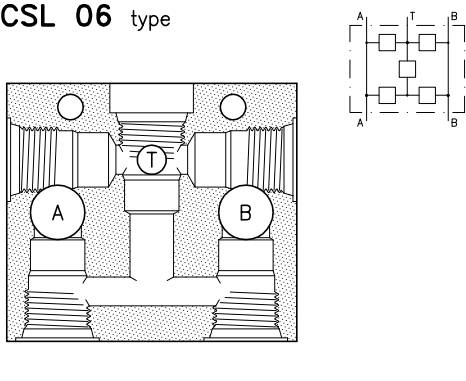
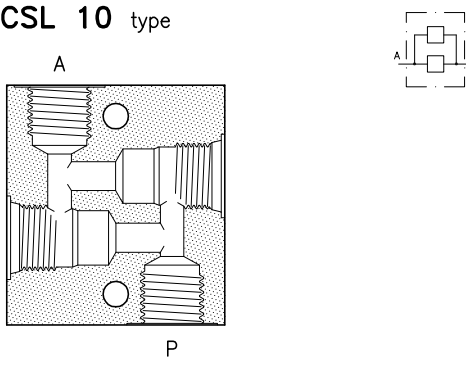


This series of bodies, realized in anodized aluminium alloy includes all standard versions normally available.
 On request they can be supplied in galvanized steel and with different uses.
 For out standard uses choiche please see technical schedule 17.010 (D - I - S type ports).
 Technical schedule - Typical cartridges used and external dimensions.

	Ordering Code Aluminium Bodies	Valve cavity	Ports	Technical schedule
Body CSL 03 type 	20-CSL 03-B05 28 144 107	S 20/2	G 1/4 (B05)	02.210
	20-CSL 03-B06 28 144 108	S 20/2	G 3/8 (B06)	02.210
	30-CSL 03-B06 38 144 122	S 30/2	G 3/8 (B06)	02.230
	30-CSL 03-B08 38 144 123	S 30/2	G 1/2 (B08)	02.230
	50-CSL 03-B08 58 144 113	S 50/2	G 1/2 (B08)	02.260
	50-CSL 03-B12 58 144 114	S 50/2	G 3/4 (B12)	02.260
	70-CSL 03-B16 78 144 104	S 70/2	G 1 (B16)	02.270
	70-CSL 03-B20 78 144 105	S 70/2	G 1.1/4 (B20)	02.270
Body CSL 04 type 	20-CSL 04-B05 28 144 150	S 20/2	G 1/4 (B05)	02.300
	20-CSL 04-B06 28 144 111	S 20/2	G 3/8 (B06)	02.300
	30-CSL 04-B06 38 144 207	S 30/2	G 3/8 (B06)	02.310
	30-CSL 04-B08 38 144 109	S 30/2	G 1/2 (B08)	02.310
	50-CSL 04-B08 58 144 147	S 50/2	G 1/2 (B08)	02.320
	50-CSL 04-B12 58 144 115	S 50/2	G 3/4 (B12)	02.320
	70-CSL 04-B16 78 144 106	S 70/2	G 1 (B16)	02.330
	70-CSL 04-B20 78 144 124	S 70/2	G 1.1/4 (B20)	02.330
Body CSL 06 type 	20-CSL 06-B05 28 144 151	S 20/2	G 1/4 (B05)	02.340
	20-CSL 06-B06 28 144 117	S 20/2	G 3/8 (B06)	02.340
	30-CSL 06-B06 38 144 208	S 30/2	G 3/8 (B06)	02.350
	30-CSL 06-B08 38 144 124	S 30/2	G 1/2 (B08)	02.350
	50-CSL 06-B08 58 144 148	S 50/2	G 1/2 (B08)	02.370
	50-CSL 06-B12 58 144 116	S 50/2	G 3/4 (B12)	02.370
	70-CSL 06-B16 78 144 107	S 70/2	G 1 (B16)	02.380
	70-CSL 06-B20 78 144 125	S 70/2	G 1.1/4 (B20)	02.380
Body CSL 10 type 	20-CSL 10I-B05 28 144 157	S 20/2	G 1/4 (B05)	
	20-CSL 10I-B06 28 144 158	S 20/2	G 3/8 (B06)	
	30-CSL 10-B06 38 144 127	S 30/2	G 3/8 (B06)	04.080
	30-CSL 10-B08 38 144 128	S 30/2	G 1/2 (B08)	04.080
	50-CSL 10-B08 58 144 119	S 50/2	G 1/2 (B08)	04.090
	50-CSL 10-B12 58 144 120	S 50/2	G 3/4 (B12)	04.090
	70-CSL 10-B16 78 144 110	S 70/2	G 1 (B16)	04.100
	70-CSL 10-B20 78 144 111	S 70/2	G 1.1/4 (B20)	04.100